

# PROSSER<sup>®</sup>

## Prosser Standard-Line<sup>®</sup> Submersible Dewatering Pumps

Heads to 210'  
Flows to 1400GPM  
¾ - 50 HP  
Discharge Sizes 2" - 6"  
Slim Line Design

### Prosser<sup>®</sup> Versatility

If you need to remove unwanted water, a Prosser portable electric submersible pump is your solution. Prosser Standard-Line<sup>®</sup> pumps offer high head or high volume performance and are available in over 130 outstanding models. You can also include optional features such as watertight control enclosures, liquid level controls, adapter kits, and more. This wide range of choices enables you to select the exact pump you need to fit your application.



### Unlimited Applications

Wherever unwanted water is found, Prosser Standard-Line<sup>®</sup> submersible pumps are the most cost-effective choice for efficient, reliable dewatering. Prosser pumps have proven their value with dependable performance in a variety of challenging applications including:

- Construction
- Industrial
- Marine
- Utilities/Telecommunication
- Municipal and Government



# Products

Selection Chart (60Hz):								
Discharge Size	HP	Head in Feet	Flow (U.S. GPM)	Max. Pump Diameter	Length	Weight (Pump Only)	Suction Connection	Discharge Connection
2"	¾ (a)	5	98	5½" (140 mm)	15.74" (400 mm)	23 lbs (10.4 Kgs)	1½" 9 NHT	2" NPT (F)
		15	80					
		25	57					
	1 (a)	35	27	5½" (140 mm)	15.74" (400 mm)	23 lbs (10.4 Kgs)	1½" 9 NHT	2" NPT (F)
		40	20					
	2 (b)	25	120	7" (188 mm)	18" (457 mm)	50 lbs (23 Kgs)	3" Vict (M)	2" & 3" NPT (F)
2½ HH (c)	42	80	7" (188 mm)	18" (457 mm)	50 lbs (23 Kgs)	3" Vict (M)	2" & 3" NPT (F)	
	55	50						
68	20							
3"	2¾ (b)	30	140	7" (188 mm)	18" (457 mm)	50 lbs (23 Kgs)	3" Vict (M)	2" & 3" NPT (F)
		50	100					
		65	75					
	2½ HV (c)	78	30	7" (188 mm)	18" (457 mm)	50 lbs (23 Kgs)	3" Vict (M)	2" & 3" NPT (F)
		10	290					
	5 HH (c)	20	230	7" (188 mm)	18" (457 mm)	50 lbs (23 Kgs)	3" Vict (M)	2" & 3" NPT (F)
30		160						
45	50							
3½ (b)	65	150	7" (188 mm)	24" (609 mm)	65 lbs (30 Kgs)	3" Vict (M)	2" & 3" NPT (F)	
	105	100						
	125	75						
5 HV (c)	145	50	7" (188 mm)	22" (559 mm)	65 lbs (30 Kgs)	3" Vict (M)	3" NPT (F)	
	10	290						
	20	230						
4"	10 HV (c)	30	300	7" (188 mm)	22" (559 mm)	65 lbs (30 Kgs)	3" Vict (M)	3" NPT (F)
		55	200					
		70	125					
	10 HH (c)	85	50	10½" (267 mm)	29" (737 mm)	150 lbs (68 Kgs)	5" Vict (M)	4" NPT (F)
20		450						
65		300						
15 HV (c)	102	200	10½" (267 mm)	29" (737 mm)	150 lbs (68 Kgs)	5" Vict (M)	4" NPT (F)	
	140	100						
	30	800						10½" (267 mm)
50	600							
87	400							
15 HH (c)	120	200	10½" (267 mm)	41" (787 mm)	155 lbs (70 Kgs)	5" Vict (M)	4" NPT (F)	
	20	550						
	60	450						
6"	25 HV (c)	120	500	12¾" (327 mm)	37" (940 mm)	275 lbs (125 Kgs)	6" Vict (M)	6" NPT (F)
		150	200					
		50	800					
	25 HH (c)	105	600	12¾" (327 mm)	37" (940 mm)	275 lbs (125 Kgs)	6" Vict (M)	6" NPT (F)
160		400						
200		200						
50 HV (c)	50	1400	12¾" (327 mm)	37" (940 mm)	343 lbs (156 Kgs)	6" Vict (M)	6" NPT (F)	
	100	1100						
	140	750						
50 HH (c)	160	500	12¾" (327 mm)	37" (940 mm)	343 lbs (156 Kgs)	6" Vict (M)	6" NPT (F)	
	80	1000						
	150	600						
	180	450						
	210	250						

HV = High Volume      HH = High Head  
Available in (a) 1 & 3 phase, (b) 1 phase, or (c) 3 phase

## Performance You Can Count On

### Benefits:

- Pumps require no priming, suction hose, or foot valve. Just submerge them and they are ready to go.
- Operate in any position.
- Bearings require no outside lubrication.
- Unique in-line design ensures a cool-running motor by transferring motor heat directly to the pumped fluid.
- Can run dry for short periods without damage.
- Abrasion resistant impellers and silicon carbide outboard shaft seals also help ensure trouble-free performance.

## Greater Performance Pound for Pound

Prosser is an industry leader in hydraulic efficiency. Prosser pumps deliver exceptionally high GPM for their size and horsepower. That means sites are dewatered faster, reducing labor costs. Prosser pumps are lightweight for easier portability and in many cases can be moved by one individual. These durable pumps provide reliable performance year after year.

## Prosser Pump Control and Accessories

### Pump Control Panels

- Equipped with a special circuit breaker that provides protection against short circuit, overload, and locked rotor by disconnecting power to the pump if any of these conditions occur. The circuit breaker also serves as a manual across-the-line motor control.
- Includes a reset button to start pumping once conditions have been corrected.
- Offered with standard length cable (other lengths available).
- Optional rainproof (NEMA 3R) or watertight (NEMA 4) corrosion-resistant enclosures available.

### Galvanic Protection Kit

- Protects pump against corrosion caused by electrolytic action.

### Adjustable Pump Stand and Extended Strainer

- Designed to raise the pump's suction screen above sludge in a manhole or pit.
- Removes water with a top-down pumping action to a level of 6" - 8" from the bottom.
- Easily assembled and disassembled.
- Fits all Prosser Standard-Line® pumps to 5 HP.

### Liquid Level Controls




## Prosser Pumps for Specialized Applications

Prosser also offers portable submersible pumps designed to meet the exact requirements of special pumping applications. Prosser pumps were first developed for the U.S. Navy in 1942 for marine damage control. Hymergible® pumps are designed for use with hydraulic systems in locations where electrical connections are unavailable or hazardous. Prosser portable submersible pumps can provide the pumping diversity you need for any application.

### Prosser Hymergible Portable Hydraulically-Driven Submersibles

- Flows to 1340 GPM
- Heads to 320 Feet

# PROSSER®

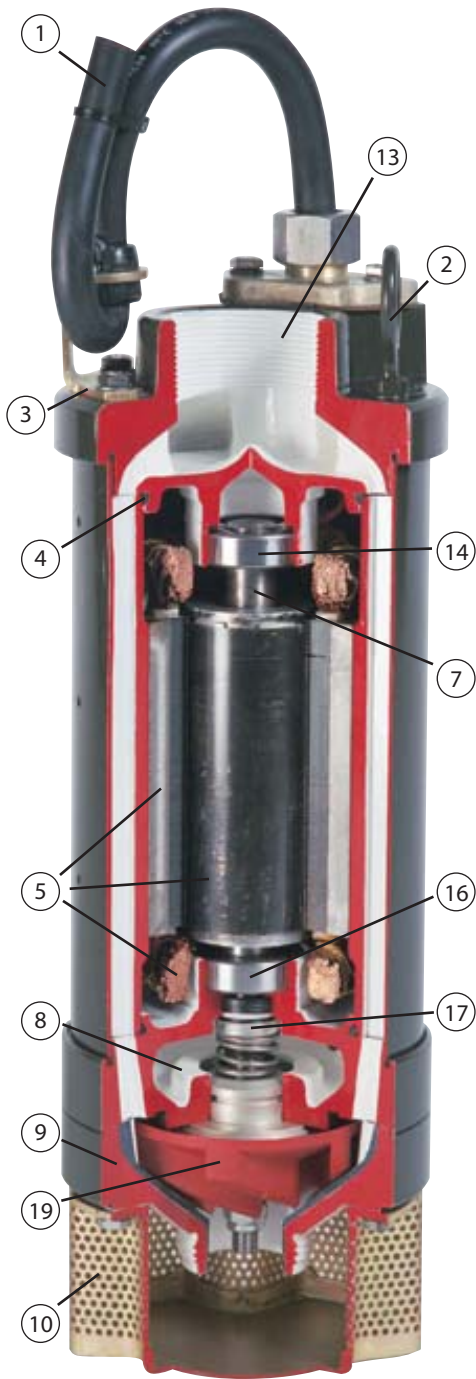

1. Type SO or Type G power cable with cable strain relief on all pumps for maximum cable and connection protection.
2. Eyebolt on  $\frac{3}{4}$  and 1 HP (Two lifting lugs on center line or larger units).
3. Hardware is stainless steel ( $\frac{3}{4}$  and 1 HP only) or zinc-plated to resist erosion, corrosion and wear.
4. Buna "N" O-ring static seals.
5. Motor construction with silicon steel laminations, die-cast aluminum rotors and copper magnet wire. Also utilizes a Class B ( $\frac{3}{4}$  and 1 HP) and Class F (2 - 50 HP) insulation system.
6. Anti-corrosion treated wetted surfaces.
7. Stainless steel shaft resists corrosion and water.
8. Oil chamber for seal lubrication.
9. Suction case made of 356T6 Aluminum, anti-corrosion coated, plus wear-resistant polyurethane liner.
10. Rugged suction strainer is zinc plated (stainless steel).
11. Water-tight connection box (not shown).
12. Pressure test plug to check integrity of pump seals (not shown).
13. 356T6 Aluminum, anti-corrosion coated discharge head.
14. Permanently lubricated radial bearings.
15. Special abrasion resistant wear plate on 2 - 5 HP models protects the diffuser from abrasive material (not shown).
16. Permanently lubricated thrust bearings.
17. Inboard ceramic and carbon shaft seal with Buna "N" elastomers.
18. Outboard Prosser-designed silicon carbide shaft seal with Viton® elastomers for durability and wear resistance (not shown).
19. Polyurethane impellers with stainless steel option on  $\frac{3}{4}$  - 1 HP units. Abrasive-resistant impellers of hardened 440C stainless steel (58C Rockwell) on 2 HP and larger models.

## Trouble-Free operation enhances productivity

### Design for Use in hard-to-reach places

The slim-line design of Prosser pumps lets them fit where other pumps can't. This is especially useful and cost-effective in well-type dewatering. Prosser's small size allows you to use smaller diameter well casings and screens. For example, Prosser 2" or 3" discharge pumps can be used in 8" casings, while other comparably rated pumps require 16" or larger casings.

### Series Operation Increases Productivity

The in-line suction and discharge of the Prosser Standard-Line pumps permits pumps to be connected in series providing double the discharge pressure. Series operation enables you to use the same pumps on different jobs with varying head requirements or with smaller diameter well casings. While a single pump may be sufficient for one job, simply connecting pumps in a series permits two small pumps to do the work of one large pump.

### Built Rugged for Dependability

Prosser pumps are designed with reliability and simplicity in mind. All Prosser Standard-Line® pumps are made in the U.S.A. They are CSA approved and Contractors Pump Bureau (CPB) rated. Each pump passes rigorous performance tests before it is shipped. All vital parts, such as shaft seals and suction case liners, are subjected to torture tests that can ensure they can stand up to the most challenging application. Every pump is shipped with complete operation and maintenance instruction to ensure dependable performance. Some Prosser pumps have been in use for over 40 years. If a problem should occur, all of our pumps are field repairable with standard tools. They can also be serviced by the numerous Prosser distributors and authorized service centers across the U.S.

Take a good look at Prosser's Standard-Line® portable electric submersible pumps. No matter how you evaluate us - cost, size, weight, construction, performance or ease of maintenance - you'll discover that Prosser consistently outshines its competitors.

*Since 1942, people who require quality and performance have specified Prosser® Pumps.*

## CRANE®

A Crane Co. Company

## PUMPS & SYSTEMS

**Crane Pumps & Systems**  
420 Third Street  
Piqua, Ohio 45356  
(937) 778-8947  
Fax (937) 773-7157  
www.cranepumps.com

**Crane Pumps & Systems Canada**  
83 West Drive  
Brampton, Ont. Canada L6T 2J6  
(905) 457-6223  
Fax (905) 457-2650



© 2011 Crane Pumps & Systems, Inc.  
A Crane Co. Company  
Printed in U.S.A.  
PROSTDDBRO - Rev. A (3/11)

Member of  
**Hydraulic**